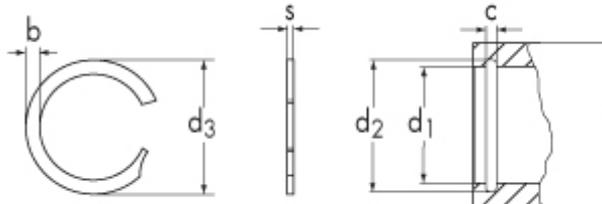


SMALLEY® SPIRAL RETAINING RINGS
SAE 1060-75 Carbon Steel

 surface treatment:
Oil dipped
Example of designation: FH-013

**Carichi pesanti
 FH - for bores
 for groove DIN
 472**

**d1=shaft diameter
 d2=groove diameter
 d3=external ring diameter
 S=thickness**

description	Price Euro x100	% Price Change		Package
		1	2	
FH-016	27,00	+ 20%	-	1000

DESCRIPTION	GROOVE	THRUST CAPACITY
FH-016	d2	ring shear Newtons 13.029 (safety factor =3)
d1 mm 16.00	mm 16.80	groove yield Newtons 3.172 (based on a groove material yield strength of 310/mm and a safety factor of 2)
RING IN THE UNSTRESSED STATE	Toll. d2	
d3	mm +0,11	
mm 16.90	c	
Toll. d3	mm 1.10	
mm +00,33	Toll. c	
b	mm +0,140	
mm 1.65		
Toll. b		
mm +/-0.10		
s		
mm 0.94		
Toll. s		
mm +/-0,05		
Weight Kg/1000		
0.46		

Technical informations are indicative and can be updated.

Copyright Gandini Fasteners S.r.l. All rights reserved. No part of this web site may be reproduced in any form without express permission.

GANDINI FASTENERS SRL viale Pier Paolo Pasolini, 83 - 20099 Sesto S.Giovanni Milano Italy
 Tel. +39 02 241 047 250 Fax +39 02 241 047 74

 Produzione e distribuzione
 fasteners, elementi di
 fissaggio e lavorazioni
 meccaniche

GANDINI FASTENERS SRL
 viale Pier Paolo Pasolini, 83
 Sesto San Giovanni Mi - Italy

Uffici Commerciali
 250@gandini.it
 tel +39 02 241 047 250

Amministrazione
 350@gandini.it
 tel +39 02 241 047 350