


## CYLINDRICAL, TAPER AND GROOVED PINS

### MATERIAL: STEEL

AVP or carbon steel according to stock availability

### Ground

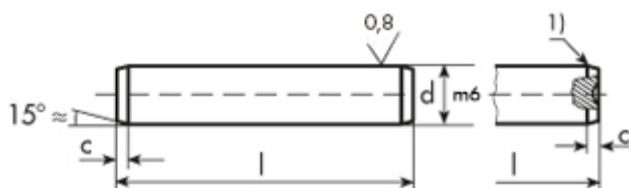

End shape depending on the manufacturer's choice

1) Radius and concavity of the end of the pin are accepted

CYLINDRICAL PINS  
ISO 2338  
not-hardened  
(m6)

UNI 1707



| L    | tolerance | d (m6) | description         | Price<br>Euro /100 | % Price Change |   | Package | c   |
|------|-----------|--------|---------------------|--------------------|----------------|---|---------|-----|
|      |           |        |                     |                    | 1              | 2 |         |     |
| 8.00 | ± 0.25    | 2.5    | <b>2.5 X 8 (m6)</b> | <b>3.30</b>        | -              | - | 500     | 0.4 |

Technical informations are indicative and can be updated.

Copyright Gandini Fasteners S.r.l. All rights reserved. No part of this web site may be reproduced in any form without express permission.

**GANDINI FASTENERS SRL** viale Pier Paolo Pasolini, 83 - 20099 Sesto S.Giovanni Milano Italy

Tel. +39 02 241 047 250 Fax +39 02 241 047 74

Production and distribution  
of fasteners, fixing elements  
and mechanical parts  
machining

**GANDINI FASTENERS SRL**  
viale Pier Paolo Pasolini, 83  
Sesto San Giovanni Mi - Italy

**Sales department**  
250@gandini.it  
tel +39 02 241 047 250

**Administration**  
350@gandini.it  
tel +39 02 241 047 350