



e-mail to 250@gandini.it or fax to +39 02 241 047 74

Name Surname Date

Company

Address Zip Code City Nation

Phone Fax

E-mail


DIMENSIONS (mm):

Operates in bore diameter

Inside diameter clears shaft

Specify which diameter the spring should pilot closest to:

Bore Shaft

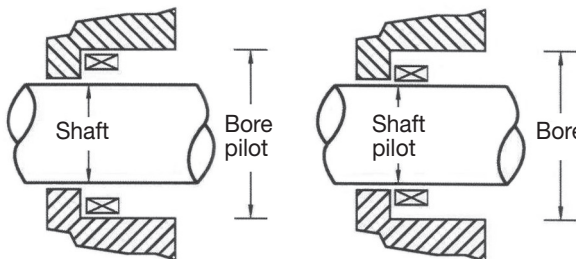

TYPE:

- CM**
- SSR**
- RW**
-

LOAD - DEFLECTION (Select one):

Group A

Load N @ Work Height mm

Free Height mm Approx.

Group B

Load N @ Work Height mm

Load N @ Work Height mm

Free Height mm Approx.

MATERIALE:

Working temperature °C

- * Carbon steel SAE 1070/1090
- * Stainless steel 17-7 PH/CH 900 (S17)
- * Stainless steel AISI 302 (S02)
- * Stainless steel AISI 316 (S16)
- Inconel X 750 (INX)
- Inconel 718 (I18)
- A286 (A86)
- Elgiloy (LGY)
- Other

* Standard execution

FINISH:

- * Oil dipped (Carbon steel)
- * Vapor degreased and ultrasonic cleaned (Stainless steel)
- Passivate (PA)
- Black Oxide (BA)
- Phosphate Coat (PS)
- Vibratory Deburr (DV)
- Other

DRAWING/DRAFT:

(if you send the filled form directly by email, please provide the drawing in a separate attachment)

FATIGUE Specify estimated cycle life:

- Static application
- Under 10⁵ cycle life
- 10⁵ cycle life
- 10⁶ cycle life
- Over 10⁶ cycle life

QUANTITY: Prototypes

Production

Application description:

GANDINI SPA