


SMALLEY® SPIRAL RETAINING RINGS

SAE 1070-90 Carbon Steel

surface treatment:
Oil dipped

Example of designation: XAS 31

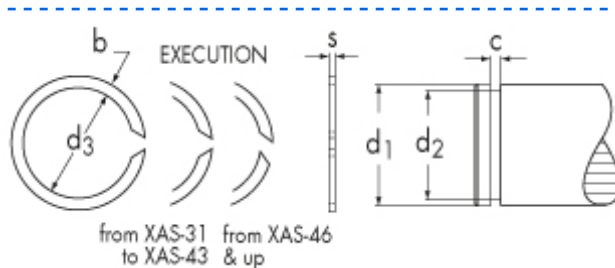

d1=shaft diameter
d2=groove diameter
d3=internal ring diameter
S=thickness

Medium duty
series
**XAS - for shafts
(in inches)**



description	Price Euro x100	% Price Change		Package
		1	2	
XAS-215	170,00	+ 20%	-	100

DESCRIPTION	GROOVE	THRUST CAPACITY
XAS-215	d2 inch. 2.056 mm 52.22	ring shear Newtons 81.344 L.B.S. 18,288
d1 mm 54.76	Toll. d2 inch. +/-0,006 mm +/-0,15	(safety factor =3)
d1 inch 2.156	c inch. 0.086 mm 2.18	groove yield Newtons 33.893 L.B.S. 7,620
RING IN THE UNSTRESSED STATE		(based on a groove material yield strength of 310/mm and a safety factor of 2)
d3 inch. 2.026 mm 51.46	Toll. c inch. +0,005 mm +0,130	
Toll. d3 inch. -0,046 mm -1,17		
b inch. 0.156 mm 3.96		
Toll. b inch. +/-0,005 mm +/-0,13		
s inch. 0.078 mm 1.98		
Toll. s inch. +/-0,002 mm +/-0,05		
Weight Kg/1000 10.60		

Technical informations are indicative and can be updated.

Copyright Gandini Fasteners S.r.l. All rights reserved. No part of this web site may be reproduced in any form without express permission.

GANDINI FASTENERS SRL viale Pier Paolo Pasolini, 83 - 20099 Sesto S.Giovanni Milano Italy
Tel. +39 02 241 047 250 Fax +39 02 241 047 74

Production and distribution
of fasteners, fixing elements
and mechanical parts
machining

GANDINI FASTENERS SRL
viale Pier Paolo Pasolini, 83
Sesto San Giovanni Mi - Italy

Sales department
250@gandini.it
tel +39 02 241 047 250

Administration
350@gandini.it
tel +39 02 241 047 350