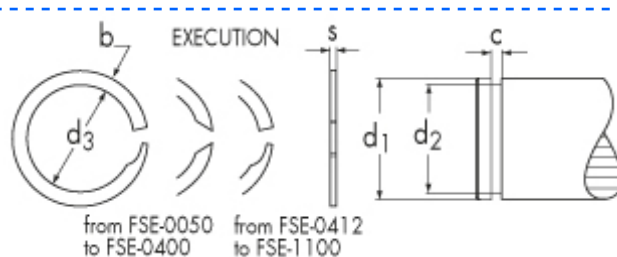


SMALLEY® SPIRAL RETAINING RINGS
SAE 1060-75 Carbon Steel

surface treatment:
Oil dipped
Example of designation: FSE-0050

**Carichi pesanti
FSE - for shafts
(in inches)**

d1=shaft diameter
d2=groove diameter
d3=internal ring diameter
S=thickness

description	Price Euro x100	% Price Change		Package
		1	2	
FSE-0212	170,00	+ 20%	-	100

DESCRIPTION	GROOVE	THRUST CAPACITY
FSE-0212	d2 inch. 2.007 mm 50.98	ring shear Newtons 81.243 L.B.S. 18,265
d1 mm 53.98	Toll. d2 inch. -0,012 mm -0,300	(safety factor =3)
d1 inch 2.125	c inch. 0.085 mm 2.16	groove yield Newtons 39.418 L.B.S. 8,862
	Toll. c inch. +0,006 mm +0,150	(based on a groove material yield strength of 310/mm and a safety factor of 2)
RING IN THE UNSTRESSED STATE		
d3 inch. 1.987 mm 50.47		
Toll. d3 inch. -0,025 mm -0,64		
b inch. 0.200 mm 5.08		
Toll. b inch. +0,004/-0,006 mm +0,10/-0,15		
s inch. 0.076 mm 1.93		
Toll. s inch. +/-0,003 mm +/-0,08		
Weight Kg/1000 12.26		

Technical informations are indicative and can be updated.

Copyright Gandini Fasteners S.r.l. All rights reserved. No part of this web site may be reproduced in any form without express permission.

GANDINI FASTENERS SRL viale Pier Paolo Pasolini, 83 - 20099 Sesto S.Giovanni Milano Italy
Tel. +39 02 241 047 250 Fax +39 02 241 047 74

Produzione e distribuzione
fasteners, elementi di
fissaggio e lavorazioni
meccaniche

GANDINI FASTENERS SRL
viale Pier Paolo Pasolini, 83
Sesto San Giovanni Mi - Italy

Uffici Commerciali
250@gandini.it
tel +39 02 241 047 250

Amministrazione
350@gandini.it
tel +39 02 241 047 350