


SMALLEY® SPIRAL RETAINING RINGS

Acciaio al Carbonio per Molle
SAE 1070-90

surface treatment:
Oliatura

Esempio di designazione: WHT-50

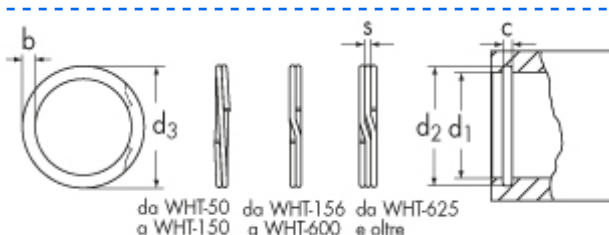

Medium-heavy
duty series
WHT - per fori
(in pollici)



d1=diametro foro
d2=diametro gola
d3=diametro esterno
S=spessore

description	Price Euro x100	% Price Change	Package
WHT-300	190,00	+ 20%	100

DESCRIPTION	GROOVE	THRUST CAPACITY
WHT-300	d2 inch. 3.165 mm 80.39	ring shear Newtons 155.947 L.B.S. 35,060
d1 mm 76.20	Toll. d2 inch. +/-0,006 mm +/-0,15	(safety factor =3)
d1 inch 3.000	c inch. 0.103 mm 2.62	groove yield Newtons 78.285 L.B.S. 17,600
RING IN THE UNSTRESSED STATE	Toll. c inch. +0,005 mm +0,130	(based on a groove material yield strength of 310/mm and a safety factor of 2)
d3 inch. 3.188 mm 80.98		
Toll. d3 inch. +0,025 mm +0,64		
b inch. 0.188 mm 4.78		
Toll. b inch. +/-0,005 mm +/-0,13		
s inch. 0.093 mm 2.36		
Toll. s inch. +/-0,003 mm +/-0,08		
Weight Kg/1000 20.35		

Technical informations are indicative and can be updated.

Copyright Gandini Fasteners S.r.l. All rights reserved. No part of this web site may be reproduced in any form without express permission.

GANDINI FASTENERS SRL viale Pier Paolo Pasolini, 83 - 20099 Sesto S.Giovanni Milano Italy
Tel. +39 02 241 047 250 Fax +39 02 241 047 74

Production and distribution
of fasteners, fixing elements
and mechanical parts
machining

GANDINI FASTENERS SRL
viale Pier Paolo Pasolini, 83
Sesto San Giovanni Mi - Italy

Sales department
250@gandini.it
tel +39 02 241 047 250

Administration
350@gandini.it
tel +39 02 241 047 350