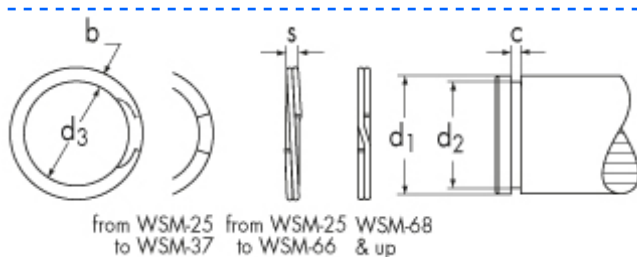


SMALLEY® SPIRAL RETAINING RINGS
SAE 1070-90 Carbon Steel

 surface treatment:
Oil dipped
Example of designation: WSM-25

d1=shaft diameter
d2=groove diameter
d3=internal ring diameter
S=thickness

 Heavy duty
 series
WSM - for shafts
 (in inches)


description	Price Euro x100	% Price Change		Package
		1	2	
WSM-437	600,00	+ 20%	-	25

DESCRIPTION	GROOVE	THRUST CAPACITY
WSM-437	d2 inch. 4.190 mm 106.43	ring shear Newtons 271.461 L.B.S. 61,030
d1 mm 111.13	Toll. d2 inch. +/-0,006 mm +/-0,15	(safety factor =3)
d1 inch 4.375	c inch. 0.120 mm 3.05	groove yield Newtons 127.924 L.B.S. 28,760
RING IN THE UNSTRESSED STATE	Toll. c inch. +0,005 mm +0,130	(based on a groove material yield strength of 310/mm and a safety factor of 2)
d3 inch. 4.161 mm 105.69		
Toll. d3 inch. -0,035 mm -0,89		
b inch. 0.270 mm 6.86		
Toll. b inch. +0,004/-0,006 mm +0,10/-0,15		
s inch. 0.111 mm 2.82		
Toll. s inch. +/-0,003 mm +/-0,08		
Weight Kg/1000 51.03		

Technical informations are indicative and can be updated.

Copyright Gandini Fasteners S.r.l. All rights reserved. No part of this web site may be reproduced in any form without express permission.

GANDINI FASTENERS SRL viale Pier Paolo Pasolini, 83 - 20099 Sesto S.Giovanni Milano Italy
 Tel. +39 02 241 047 250 Fax +39 02 241 047 74

 Production and distribution
 of fasteners, fixing elements
 and mechanical parts
 machining

GANDINI FASTENERS SRL
 viale Pier Paolo Pasolini, 83
 Sesto San Giovanni Mi - Italy

Sales department
 250@gandini.it
 tel +39 02 241 047 250

Administration
 350@gandini.it
 tel +39 02 241 047 350