


SMALLEY® SPIRAL RETAINING RINGS

Stainless steel
AISI 302

surface treatment:
Steam degreasing
Ultrasonic cleaning

Example of designation:
HHMU-10-S02

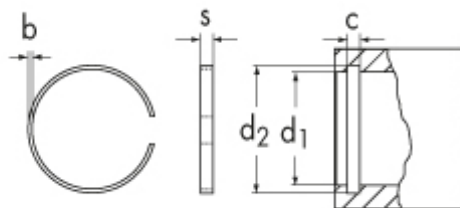

HHMU - for
bores without
removing ear



d1=shaft diameter
d2=groove diameter
d3=internal ring diameter
S=thickness

description	Price Euro x100	% Price Change		Package
HHMU-68-S02	800,00	1 + 20%	2 -	50

DESCRIPTION	GROOVE	THRUST CAPACITY
HHMU-68-S02	d2	groove yield Newtons 18.940 (based on a groove material yield strength of 310/mm and a safety factor of 2)
d1 mm 68.00	mm 69.14	
	Toll. d2	
	mm +/-0,15	
	c	
	mm 5.87	
	Toll. c	
	mm +0,130	
RING IN THE UNSTRESSED STATE		
d3		
mm 70.50		
Toll. d3		
mm +0,76		
b		
mm 1.14		
Toll. b		
mm +/-0,05		
s		
mm 5.72		
Toll. s		
mm +/-0,13		
Weight Kg/1000		
11.56		

Technical informations are indicative and can be updated.

Copyright Gandini Fasteners S.r.l. All rights reserved. No part of this web site may be reproduced in any form without express permission.

GANDINI FASTENERS SRL viale Pier Paolo Pasolini, 83 - 20099 Sesto S.Giovanni Milano Italy
Tel. +39 02 241 047 250 Fax +39 02 241 047 74

Production and distribution
of fasteners, fixing elements
and mechanical parts
machining

GANDINI FASTENERS SRL
viale Pier Paolo Pasolini, 83
Sesto San Giovanni Mi - Italy

Sales department
250@gandini.it
tel +39 02 241 047 250

Administration
350@gandini.it
tel +39 02 241 047 350