


SMALLEY® SPIRAL RETAINING RINGS

Stainless steel
AISI 302

surface treatment:
Steam degreasing
Ultrasonic cleaning

Example of designation:
HHU-37-S02

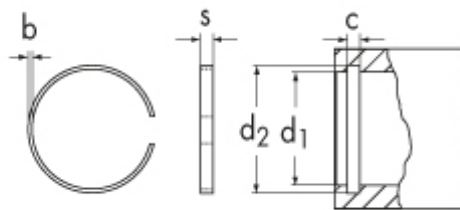

HHU for bores
(in inches)
without
removing ear



d1=shaft diameter
d2=groove diameter
d3=internal ring diameter
S=thickness

description	Price Euro x100	% Price Change		Package
		1	2	
HHU-59-S02	103,00	+ 20%	-	500

DESCRIPTION	GROOVE	THRUST CAPACITY
HHU-59-S02	d2 inch. 0.615 mm 15.62	groove yield Newtons 1.962 L.B.S. 441
d1 mm 15.09	Toll. d2 inch. +/-0,002 mm +/- 0,05	(based on a groove material yield strength of 310/mm and a safety factor of 2)
d1 inch 0.594	c inch. 0.070 mm 1.78	
RING IN THE UNSTRESSED STATE	Toll. c inch. +0,003 mm +0,080	
d3 inch. 0.627 mm 15.93		
Toll. d3 inch. +0,015 mm +0,38		
b inch. 0.021 mm 0.53		
Toll. b inch. +/-0,0015 mm +/-0,04		
s inch. 0.065 mm 1.65		
Toll. s inch. +/-0,004 mm +/-0,10		
Weight Kg/1000 0.34		

Technical informations are indicative and can be updated.

Copyright Gandini Fasteners S.r.l. All rights reserved. No part of this web site may be reproduced in any form without express permission.

GANDINI FASTENERS SRL viale Pier Paolo Pasolini, 83 - 20099 Sesto S.Giovanni Milano Italy
Tel. +39 02 241 047 250 Fax +39 02 241 047 74

Production and distribution
of fasteners, fixing elements
and mechanical parts
machining

GANDINI FASTENERS SRL
viale Pier Paolo Pasolini, 83
Sesto San Giovanni Mi - Italy

Sales department
250@gandini.it
tel +39 02 241 047 250

Administration
350@gandini.it
tel +39 02 241 047 350