


SMALLEY® SPIRAL RETAINING RINGS

Stainless steel
AISI 302

surface treatment:
Steam degreasing
Ultrasonic cleaning

Example of designation:
FSE-0050-02

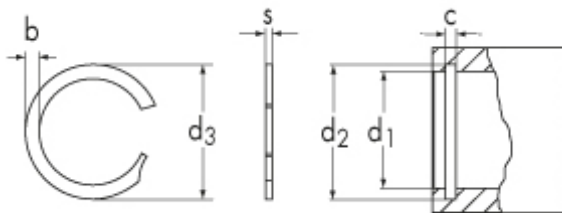

d1=shaft diameter
d2=groove diameter
d3=external ring diameter
S=thickness

Heavy duty
series
FHE - for bores
(in inches)



description	Price Euro x100	% Price Change	Package
FHE-0337-S02	1.200,00	1 + 20%	2 -

DESCRIPTION	GROOVE	THRUST CAPACITY
FHE-0337-S02		
d1 mm 85.73	d2 inch. 3.513 mm 89.23	ring shear Newtons 176.554 L.B.S. 39,693
d1 inch 3.375	Toll. d2 inch. +0,013 mm +0,330	(safety factor =3)
	c inch. 0.124 mm 3.15	groove yield Newtons 73.219 L.B.S. 16,461
	Toll. c inch. +0,007 mm +0,180	(based on a groove material yield strength of 310/mm and a safety factor of 2)
RING IN THE UNSTRESSED STATE		
d3 inch. 3.547 mm 90.09		
Toll. d3 inch. +0,035 mm +0,89		
b inch. 0.248 mm 6.30		
Toll. b inch. +/-0,005 mm +/-0,13		
s inch. 0.115 mm 2.92		
Toll. s inch. +/-0,003 mm +/-0,08		
Weight Kg/1000 33.89		

Technical informations are indicative and can be updated.

Copyright Gandini Fasteners S.r.l. All rights reserved. No part of this web site may be reproduced in any form without express permission.

GANDINI FASTENERS SRL viale Pier Paolo Pasolini, 83 - 20099 Sesto S.Giovanni Milano Italy
Tel. +39 02 241 047 250 Fax +39 02 241 047 74

Production and distribution
of fasteners, fixing elements
and mechanical parts
machining

GANDINI FASTENERS SRL
viale Pier Paolo Pasolini, 83
Sesto San Giovanni Mi - Italy

Sales department
250@gandini.it
tel +39 02 241 047 250

Administration
350@gandini.it
tel +39 02 241 047 350