

## RETAINING RINGS


**Material:** Spring steel

**Hardness:**

**SURFACE FINISHES**  
**Phosphated and oiled**  
**Blackened and oiled**  
 Manufacturer's choice

**Example of designation:**  
**NA 125 (1-1/4)**

non in tensione  
unstressed

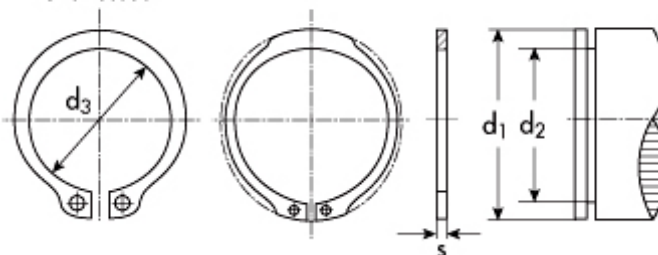

Inch type **NA**  
 DIN 471  
 UNI 3653-7435  
 for shafts



**d<sub>1</sub>**=shaft diameter  
**d<sub>2</sub>**=groove diameter  
**d<sub>3</sub>**=ring diameter in the unstressed state  
**s**=thickness

| s     | Description | Price<br>euro /100 | % Price Change |   | Package |
|-------|-------------|--------------------|----------------|---|---------|
|       |             |                    | 1              | 2 |         |
| 0.025 | NA 35       | 8,20               | -              | - | 2000    |

| RING                |       | GROOVE         | SUPPLEMENTARY DATA |       |
|---------------------|-------|----------------|--------------------|-------|
| d <sub>1</sub>      | 9.00  | d <sub>2</sub> | 0.330              | plier |
| d <sub>1</sub> inch | 0.354 |                |                    | ZGA 0 |
| s                   | 0.025 |                |                    |       |
| d <sub>3</sub>      | 0.320 |                |                    |       |

Technical informations are indicative and can be updated.

Copyright Gandini Fasteners S.r.l. All rights reserved. No part of this web site may be reproduced in any form without express permission.

**GANDINI FASTENERS SRL** viale Pier Paolo Pasolini, 83 - 20099 Sesto S.Giovanni Milano Italy  
 Tel. +39 02 241 047 250 Fax +39 02 241 047 74

Production and distribution  
 of fasteners, fixing elements  
 and mechanical parts  
 machining

**GANDINI FASTENERS SRL**  
 viale Pier Paolo Pasolini, 83  
 Sesto San Giovanni Mi - Italy

**Sales department**  
 250@gandini.it  
 tel +39 02 241 047 250

**Administration**  
 350@gandini.it  
 tel +39 02 241 047 350