


## RETAINING RINGS

**Material:** Spring steel

**Hardness:**  
48÷53 HRC 485÷560 HV

**SURFACE FINISHES**  
**Phosphated and oiled**  
**Blackened and oiled**  
Manufacturer's choice

**Example of designation:**  
ring type **G 10**

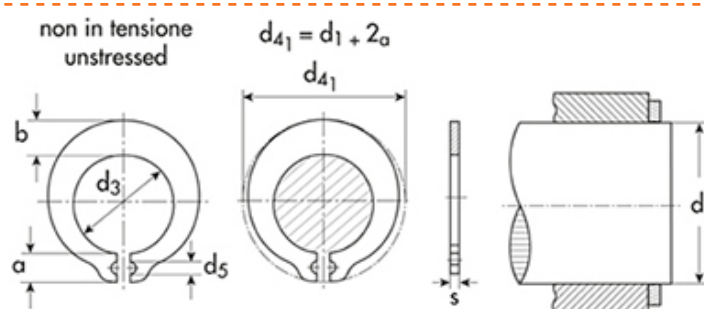

grip rings type **G**  
- for shafts



**d<sub>1</sub>**=shaft diameter  
**d<sub>3</sub>**=ring diameter in the unstressed state  
**s**=thickness

| d1    | Description | Price<br>euro /100 | % Price Change  | Package |
|-------|-------------|--------------------|-----------------|---------|
| 14.00 | <b>G 14</b> | <b>5,00</b>        | 1<br><b>NET</b> | 1000    |

| RING                      |               |
|---------------------------|---------------|
| <b>d<sub>1</sub></b>      | 14.00         |
| <b>s</b>                  | 1.50          |
| <b>d<sub>3</sub></b>      | 13.50         |
| <b>tole d<sub>3</sub></b> | +0.110 -0.110 |
| <b>a max</b>              | 5.1           |
| <b>b ~</b>                | 5.4           |
| <b>d<sub>4</sub></b>      | 25.0          |
| <b>d<sub>5</sub> min</b>  | 2.2           |
| <b>weight kg/1000</b>     | 2.456         |

| SUPPLEMENTARY DATA                           |
|----------------------------------------------|
| <b>n<sub>abl.</sub> x1000 (giri/min)</b>     |
| <b>plier</b>                                 |
| <b>H (N) retaining force of self-locking</b> |

Technical informations are indicative and can be updated.

Copyright Gandini Fasteners S.r.l. All rights reserved. No part of this web site may be reproduced in any form without express permission.

**GANDINI FASTENERS SRL** viale Pier Paolo Pasolini, 83 - 20099 Sesto S.Giovanni Milano Italy  
Tel. +39 02 241 047 250 Fax +39 02 241 047 74

Production and distribution  
of fasteners, fixing elements  
and mechanical parts  
machining

**GANDINI FASTENERS SRL**  
viale Pier Paolo Pasolini, 83  
Sesto San Giovanni Mi - Italy

**Sales department**  
250@gandini.it  
tel +39 02 241 047 250

**Administration**  
350@gandini.it  
tel +39 02 241 047 350