


## TECHNICAL PLASTIC AND METAL PARTS

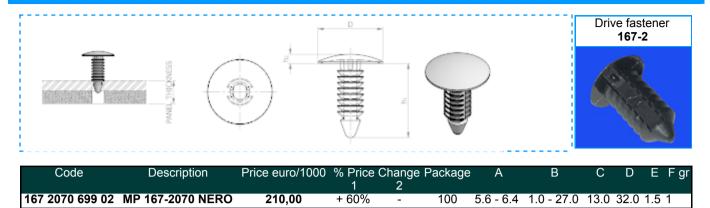

Colour	Colour num	ber	
black	699 (XXX XXXX <b>XXX</b> XX)		
Colour descriptionblackMatchesbrillantFeatured colours reserved. Due to the		easonably matches RAL colour9005 es in colour may occur.	5
Material		Material nr	
Nylon - 66 PA - 66	02 (XXX XXXX XXX <b>XX</b> )		
A strong, tough and durable material. selflubricant properties ideal for slide strongst. Therefore always has to acc Nylon is self extinguishing. <b>Features</b>	bearings. Takes in	approx 2 % moisture (a little less th	an nylon-6) and is then at its
feature	DIN	Resistance to	Valutation
Relative density gr/cm <sup>3</sup>	1,14	Petrol	A
Tensile strength MN/m <sup>2</sup>	60	Benzene	A
Elongation at break %	140	Mineral oils	А
Tensile modulus MN/m <sup>2</sup>	1500	Vegetable oils	А
Notched impact strength kJ/m <sup>2</sup>	17	Weak alkalis	А
Ball indentation MN/m <sup>2</sup>	100	Strong alkalis	В
Application temperature max °C	120	Weak acids	В
Volume resistivity cm	10^15	Strong acids	С
Dissapation factor tan. 10 <sup>3</sup> Hz	0,15	A = good	
Dielectric strength MV/m	30	<b>B</b> = doubtful	
Flammability UL94 > 1,6 mm	V2	<b>C</b> = poor	
Coefficient of friction (on steel)	0,3		
	- ) -		

Technical informations are indicative and can be updated.

Copyright Gandini Fasteners S.r.I. All rights reserved. No part of this web site may be reproduced in any form without express permission.

**GANDINI FASTENERS SRL** viale Pier Paolo Pasolini, 83 - 20099 Sesto S.Giovanni Milano Italy Tel. +39 02 241 047 250 Fax +39 02 241 047 74

Production and distribution of fasteners, fixing elements and mechanical parts machining

**GANDINI FASTENERS SRL** Sesto San Giovanni Mi - Italy **Sales department** 250@gandini.it tel +39 02 241 047 250

Administration 350@gandini.it tel +39 02 241 047 350