


## TECHNICAL PLASTIC AND METAL PARTS

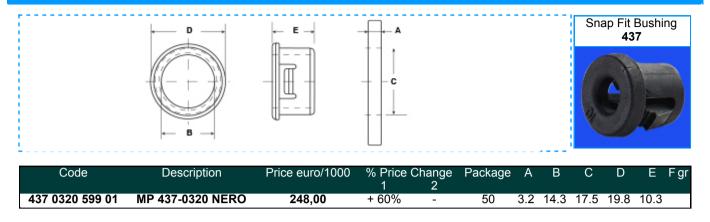

Colour	Colour numl		
black	599 (XXX XXXX <b>XXX</b> XX)		
Colour descriptionblackMatchesjet blaFeatured colours reserved. Due to the		onably matches RAL colour 9005 is in colour may occur.	
Material		Material nr	
Nylon - 6 PA - 6	01 (XXX XXXX XXX <b>XX</b> )		
General informations: A strong, tough and durable material. Iubricant properties ideal for slide bea Always has to acclimatize for a few da Features	rings. Takes in app	prox 3% moisture at room temperatu	ure and is then at its strongest.
	DIN		
feature	DIN	Resistance to	Valutation
Relative density gr/cm <sup>3</sup>	1,14	Petrol	A
Tensile strength MN/m <sup>2</sup>	55	Benzene	A
Elongation at break %	250	Mineral oils	A
Tensile modulus MN/m <sup>2</sup>	950	Vegetable oils	A
Notched impact strength kJ/m <sup>2</sup>	35	Weak alkalis	A
Ball indentation MN/m <sup>2</sup>	82	Strong alkalis	В
Application temperature max °C	120	Weak acids	В
Volume resistivity cm	10^15	Strong acids	С
Dissapation factor tan. 10 <sup>3</sup> Hz	0,2	A = good	
Dielectric strength MV/m	35	<b>B</b> = doubtful	
Flammability UL94 > 1,6 mm	V2	<b>C</b> = poor	
Coefficient of friction (on steel)	0,3		
All data are indicative			

Technical informations are indicative and can be updated.

Copyright Gandini Fasteners S.r.I. All rights reserved. No part of this web site may be reproduced in any form without express permission.

GANDINI FASTENERS SRL viale Pier Paolo Pasolini, 83 - 20099 Sesto S.Giovanni Milano Italy Tel. +39 02 241 047 250 Fax +39 02 241 047 74

Production and distribution of fasteners, fixing elements and mechanical parts machining

**GANDINI FASTENERS SRL** Sesto San Giovanni Mi - Italy **Sales department** 250@gandini.it tel +39 02 241 047 250

Administration 350@gandini.it tel +39 02 241 047 350