


## CYLINDRICAL, TAPER AND GROOVED PINS

### MATERIAL: STEEL

AVP or carbon steel according to stock availability

Ground

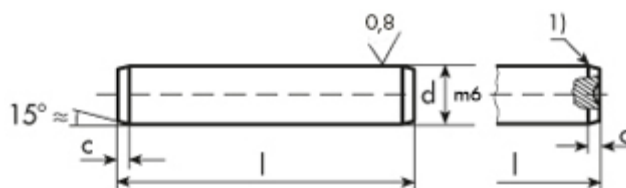

End shape depending on the manufacturer's choice

1) Radius and concavity of the end of the pin are accepted

CYLINDRICAL PINS  
ISO 2338  
not-hardened  
(m6)

UNI 1707



| L    | tolerance | d (m6) | description       | Price<br>Euro /100 | % Price Change |   | Package | c   |
|------|-----------|--------|-------------------|--------------------|----------------|---|---------|-----|
|      |           |        |                   |                    | 1              | 2 |         |     |
| 8.00 | ± 0.25    | 1.0    | <b>1 X 8 (m6)</b> | <b>5.50</b>        | -              | - | 500     | 0.2 |

Technical informations are indicative and can be updated.

Copyright Gandini Fasteners S.r.l. All rights reserved. No part of this web site may be reproduced in any form without express permission.

**GANDINI FASTENERS SRL** viale Pier Paolo Pasolini, 83 - 20099 Sesto S.Giovanni Milano Italy

Tel. +39 02 241 047 250 Fax +39 02 241 047 74

Production and distribution  
of fasteners, fixing elements  
and mechanical parts  
machining

**GANDINI FASTENERS SRL**  
viale Pier Paolo Pasolini, 83  
Sesto San Giovanni Mi - Italy

**Sales department**  
250@gandini.it  
tel +39 02 241 047 250

**Administration**  
350@gandini.it  
tel +39 02 241 047 350