


## CYLINDRICAL, TAPER AND GROOVED PINS

### MATERIAL:

100 Cr 6 (1.3505)  
Hardness 58 ÷ 62 HRC  
Resistance > 600 N/mm<sup>2</sup>

### Ground

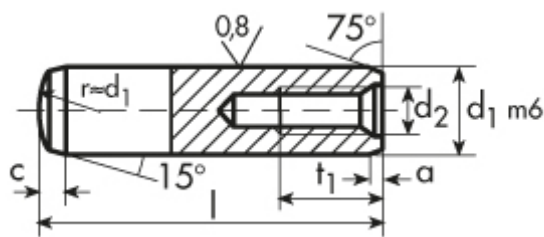

Execution with breather air depending on manufacturer's choice

CYLINDRICAL PINS  
**DIN 7979 D**  
hardened (m6)  
with internally threaded

ISO 8735  
UNI 6364 B



| L     | tolerance | d <sub>1</sub> (m6) | description        | Price<br>Euro /100 | % Price Change<br>1 | 2 | Package | a   | c   | d <sub>2</sub> | t <sub>1</sub> |
|-------|-----------|---------------------|--------------------|--------------------|---------------------|---|---------|-----|-----|----------------|----------------|
| 16.00 | ± 0,5     | 6.0                 | <b>6 X 16 (m6)</b> | <b>55,00</b>       | -                   | - | 100     | 0,8 | 2,1 | M4             | 6              |

Technical informations are indicative and can be updated.

Copyright Gandini Fasteners S.r.l. All rights reserved. No part of this web site may be reproduced in any form without express permission.

**GANDINI FASTENERS SRL** viale Pier Paolo Pasolini, 83 - 20099 Sesto S.Giovanni Milano Italy  
Tel. +39 02 241 047 250 Fax +39 02 241 047 74

Production and distribution  
of fasteners, fixing elements  
and mechanical parts  
machining

**GANDINI FASTENERS SRL**  
viale Pier Paolo Pasolini, 83  
Sesto San Giovanni Mi - Italy

**Sales department**  
250@gandini.it  
tel +39 02 241 047 250

**Administration**  
350@gandini.it  
tel +39 02 241 047 350