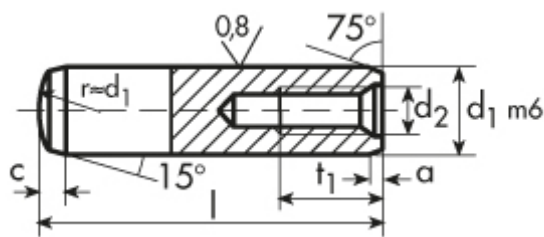


**CYLINDRICAL, TAPER AND GROOVED PINS**
**MATERIAL:**

100 Cr 6 (1.3505)  
 Hardness 58 ÷ 62 HRC  
 Resistance > 600 N/mm<sup>2</sup>

**Ground**


CYLINDRICAL PINS  
**DIN 7979 D**  
 hardened (m6)  
 with internally threaded

ISO 8735  
 UNI 6364 B



Execution with breather air depending on manufacturer's choice

| L     | tolerance | d <sub>1</sub> (m6) | description        | Price<br>Euro /100 | % Price Change<br>1 | 2 | Package | a | c | d <sub>2</sub> | t <sub>1</sub> |
|-------|-----------|---------------------|--------------------|--------------------|---------------------|---|---------|---|---|----------------|----------------|
| 36.00 | ± 0,5     | 4.0                 | <b>4 X 36 (m6)</b> | <b>230,00</b>      | -                   | - | 50      |   |   | M2,5/M3        |                |

Technical informations are indicative and can be updated.

Copyright Gandini Fasteners S.r.l. All rights reserved. No part of this web site may be reproduced in any form without express permission.

**GANDINI FASTENERS SRL** viale Pier Paolo Pasolini, 83 - 20099 Sesto S.Giovanni Milano Italy  
 Tel. +39 02 241 047 250 Fax +39 02 241 047 74

Production and distribution  
 of fasteners, fixing elements  
 and mechanical parts  
 machining

**GANDINI FASTENERS SRL**  
 viale Pier Paolo Pasolini, 83  
 Sesto San Giovanni Mi - Italy

**Sales department**  
 250@gandini.it  
 tel +39 02 241 047 250

**Administration**  
 350@gandini.it  
 tel +39 02 241 047 350