

Metallic screws and nuts

- 1) A light rounding-off or a countersink between the head and the hexagon socket is allowed.
- 2) The superior side of the head can be rounded or blunt as per manufacturer directives.
- 3) The inferior side of the head can be rounded or blunt to d_w , in both cases it will be without rags.

$$lg \max = l - b$$


$$I_s \text{ min} = I_g \text{ max} - 5p$$

If $\max = 1,7 \text{ r } \max$

```

r max = da max - ds max: 2

```

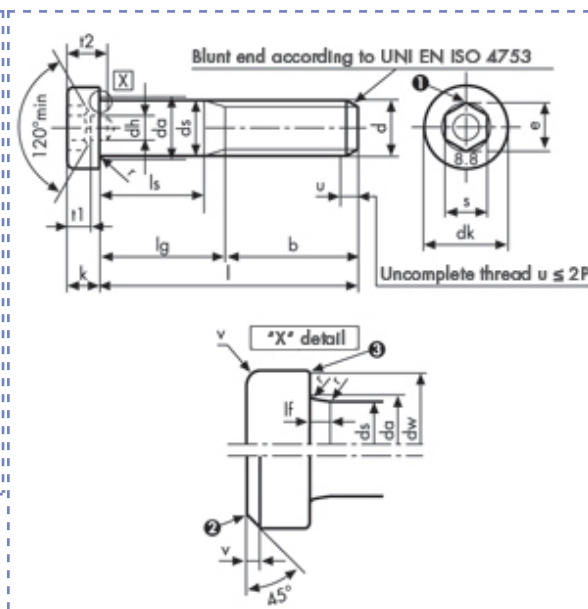

Hexagonal socket head
cap screws
low head with easer hole
DIN 6912 Class 8.8



Description	Price VATexcl. euro/100	% Price Change		Package	d mm	L mm
		1	2			
M 16 X 60	on demand	-	-	-	M16	60

M1660-691288		dh	max	8.09	r	min	0.6	
p		min		8	nom			14
b	l ≤ 125	38	ds	max	16	s	max	14.212
	125 < l ≤ 200	44	min		15.73		min	14.032
	l > 200	57	dw	min	22.83		nom	
dk	max	24	e	min	16	t1	max	5.65
	min	23.67	lf	max	1.45		min	5.35
da	max	17.7	k	max	10	t2	max	11.93
				min	9.78		min	11.5

Technical informations are indicative and can be updated.

Copyright Gandini Fasteners S.r.l. All rights reserved. No part of this web site may be reproduced in any form without express permission.

GANDINI FASTENERS SRL viale Pier Paolo Pasolini, 83 - 20099 Sesto S. Giovanni Milano Italy
Tel. +39 02 241 047 250 Fax +39 02 241 047 74

Production and distribution
of fasteners, fixing elements
and mechanical parts
machining

GANDINI FASTENERS SRL Sales department
viale Pier Paolo Pasolini, 83 250@gandini.it
Sesto San Giovanni Mi - Italy tel +39 02 241 047 250

Administration
350@gandini.it
tel +39 02 241 047 350