

Metallic screws and nuts

ISO 4014 foresees s, e, dw values different by UNI and DIN for M10, M12, M14, M22 diameters


Tolerance: A and B category according to stock availability

On request: diameters >M30 - length >300

$lg_{max} = l - b$

$ls_{min} = lg_{max} - 5p$

On request: AISI 304 - 316 - 410 - B7 - L7 materials

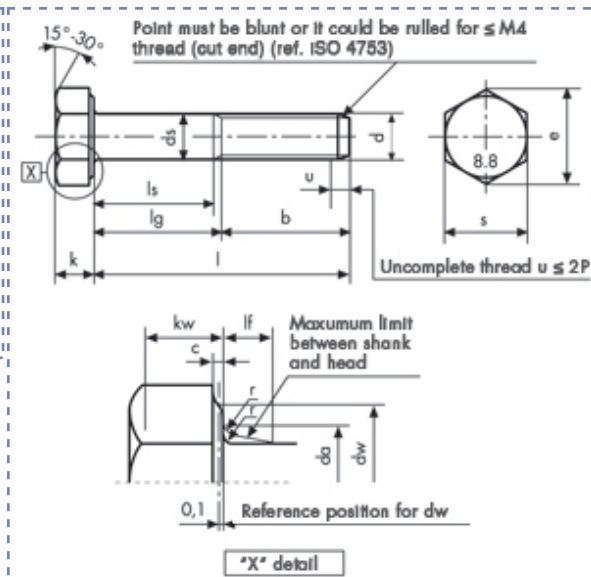

Hexagonal head screws
ISO 4014 - UNI 5737
DIN 931
partially threaded
Class 8.8 Zinc plated



Description	Price VATexcl. euro/100	% Price Change 1 2	Package	d mm	L mm
M 4 X 55 ZINCATE	11,20	+ 60%	-	1	M4 55

M 4 X 55 ZINCATE			da	max	4.7				
p			0.7	ds	max	4	k	nom	2.8
					min cat. A	3.82		min cat. A	2.675
								max cat. A	2.925
b	I ≤ 125		14	dw	min	5.88	kw	min cat. A	1.87
	125 < I ≤ 200		20						
	I > 200		33						
c	max		0.4	e	min cat. A	7.66	r	min	0.2
	min		0.15	lf	max	1.2			
							s	max	7
								min cat. A	6.78

Technical informations are indicative and can be updated.

Copyright Gandini Fasteners S.r.l. All rights reserved. No part of this web site may be reproduced in any form without express permission.

GANDINI FASTENERS SRL viale Pier Paolo Pasolini, 83 - 20099 Sesto S.Giovanni Milano Italy
Tel. +39 02 241 047 250 Fax +39 02 241 047 74

Production and distribution
of fasteners, fixing elements
and mechanical parts
machining

GANDINI FASTENERS SRL Sales department
viale Pier Paolo Pasolini, 83
Sesto San Giovanni Mi - Italy
250@gandini.it
tel +39 02 241 047 250

Administration
350@gandini.it
tel +39 02 241 047 350