


SMALLEY® SPIRAL RETAINING RINGS

**Acciaio al Carbonio per Molle
SAE 1060-75**

surface treatment:
Oliatura

Esempio di designazione: FH-013

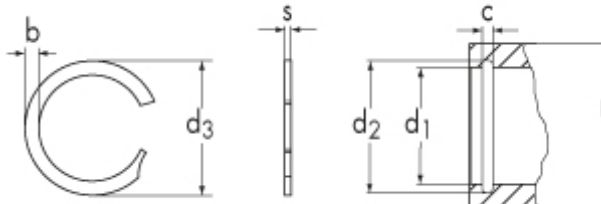

d1=diametro foro
d2=diametro gola
d3=diametro esterno
S=spessore

Heavy duty
series
**FH - per fori per
gole DIN 472**



description	Price Euro x100	% Price Change		Package
FH-075	230,00	1 + 20%	2 -	100

DESCRIPTION	GROOVE	THRUST CAPACITY
FH-075	d2	ring shear Newtons 134.456 (safety factor =3)
d1 mm 75,00	mm 78,00	
	Toll. d2	groove yield Newtons 54,780 (based on a groove material yield strength of 310/mm and a safety factor of 2)
	mm +0,3	
RING IN THE UNSTRESSED STATE	c	
d3	mm 2,65	
mm 78,75		
Toll. d3	Toll. c	
mm +00,76	mm +0,140	
b		
mm 5,08		
Toll. b		
mm +/-0.13		
s		
mm 2,41		
Toll. s		
mm +/-0,08		
Weight Kg/1000		
19,62		

Technical informations are indicative and can be updated.

Copyright Gandini Fasteners S.r.l. All rights reserved. No part of this web site may be reproduced in any form without express permission.

GANDINI FASTENERS SRL viale Pier Paolo Pasolini, 83 - 20099 Sesto S.Giovanni Milano Italy
Tel. +39 02 241 047 250 Fax +39 02 241 047 74

Production and distribution
of fasteners, fixing elements
and mechanical parts
machining

GANDINI FASTENERS SRL
viale Pier Paolo Pasolini, 83
Sesto San Giovanni Mi - Italy

Sales department
250@gandini.it
tel +39 02 241 047 250

Administration
350@gandini.it
tel +39 02 241 047 350