


RETAINING RINGS

Material: INOX X35 Cr Mo 17
INOX X39 Cr Mo 17.1 or AISI 420

ASP= up Ø 100
without lugs
INOX X12 Cr Ni 17.7

Example of designation:
ring type **A 25 STAINLESS STEEL**

non in tensione
unstressed

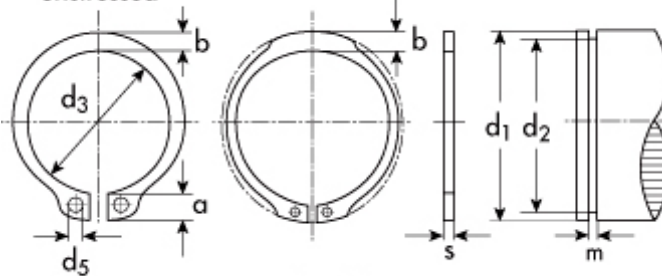

a scelta del costruttore
to manufacturer's choice



DIN 471
UNI 3653-7435
Type **A** - for
shafts

d₁=shaft diameter
d₂=groove diameter
d₃=ring diameter in the unstressed state
s=thickness

* **AA**= two holes execution

d1	Description	Price euro /100	% Price Change		Package
			1	2	
33.00	A 33 INOX	8,00	NET	-	250

RING		GROOVE		SUPPLEMENTARY DATA	
d₁	33.00	d₂	31.3	n	2.6
s	1.50	tole d₂	-0.25	FN (kN)	14.3
tole s	-0.06	m	1.60	FR (kN)	31.60
d₃	30.5	t	0.85	g	2.0
tole d₃	+0.25 -0.50			FRg (kN)	5.65
a max	5.2			AN (mm²)	86.0
b ~	3.7			K (kN.mm)	62.20
d₅ min	2.5			n_{abl,x1000} (giri/min)	17.0
weight kg/1000	3.690			plier	ZGA 2

Technical informations are indicative and can be updated.

Copyright Gandini Fasteners S.r.l. All rights reserved. No part of this web site may be reproduced in any form without express permission.

GANDINI FASTENERS SRL viale Pier Paolo Pasolini, 83 - 20099 Sesto S.Giovanni Milano Italy
Tel. +39 02 241 047 250 Fax +39 02 241 047 74

Production and distribution
of fasteners, fixing elements
and mechanical parts
machining

GANDINI FASTENERS SRL
viale Pier Paolo Pasolini, 83
Sesto San Giovanni Mi - Italy

Sales department
250@gandini.it
tel +39 02 241 047 250

Administration
350@gandini.it
tel +39 02 241 047 350